Biosan SIA., Ratsupites iela 7 k-2, Riga, Latvia , LV-1067 E-mail: marketing@biosan.lv, www.biosan.lv Phone:+37167426137

PSU-20i, Multi-functional Orbital Shaker

DESCRIPTION

Shaker **PSU-20i** provides three motion types: orbital, reciprocal and vibrating, which can be performed separately, pairwise and sequentially in repeated cycles. Shaker is designed for applications both in small specialized laboratories and in large multidisciplinary laboratories. **PSU-20i** is an ideal instrument for laboratories conducting research in biopharmaceutics and biomedicine.

Shaker PSU-20i is noiseless and reliable in operation, incorporates a direct drive system and brushless motor with a guaranteed service life up to 35,000 working hours. The use of direct drive and brushless motor allows for continuous mixing up to 7 days and ensures reliable operation for more than 2 years.

A choice of nine (9) different interchangeable platforms provides possibility of performing various procedures and techniques. Special attention should be paid to a multilevel platform, which allows accommodation of a large number of various microplates, Petri dishes, cultural bags and other low containers.

Shaker can be used in cold rooms or incubators, operating at ambient temperature range +4°C to +40°C.

SPECIFICATIONS

Speed control range	20-250* RPM (increment 5 rpm) * max. speed depends on the load and vessels' shape
Digital time setting	1 min–96 hrs / non–stop (increment 1 min)
Timer sound signal	+
Digital speed control	+
Maximum continuous operation time	168 hrs
Orbit	20 mm
Maximum load	8 kg
Overall dimensions (W×D×H)	410x410x130 mm
Weight	11.7 kg
Input current/power consumption	12 V, 3.2 A / 40 W
External power supply	Input AC 100–240 V; 50/60 Hz; Output DC 12 V

📕 CAT. NUMBER

Without platform	Without platform
BS-010145-ACI	230VAC 50/60Hz Euro plug
BS-010145-ACQ	230VAC 50/60Hz UK plug
BS-010145-AC4	230VAC 50/60Hz AU plug
BS-010145-ACJ	100VAC 50/60Hz US plug, 120VAC 60Hz US plug
BS-010145-CK	IQ OQ document
BS-010145-DK	PQ document

ACCESSORIES



pioyau

Medical-Biological





UP-330

BS-010145-AK

platform



P-30/100 BS-010135-BK

platform





P-16/250 BS-010135-CK platform

Platform with clamps for flasks.



platform

Platform with clamps for flasks.


P-9/500 BS-010135-AK



P-6/1000 BS-010135-DK platform

Platform with clamps for flasks.

Universal platform with adjustable bars can accommodate laboratory glassware of different shapes.

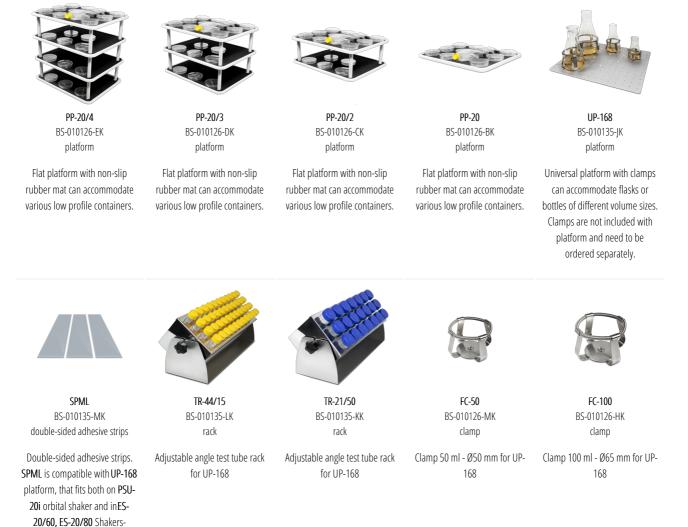

Incubators.





FC-250 BS-010126-JK clamp

FC-500 BS-010126-LK clamp



FC-1000 BS-010126-IK clamp



FC-2000 BS-010126-NK clamp

Clamp 250 ml - Ø85 mm for UP-168

Clamp 500 ml - Ø105 mm for UP-168

Clamp 1000 ml - Ø130 mm for UP-168

Clamp 2000 ml - Ø165 mm for UP-168